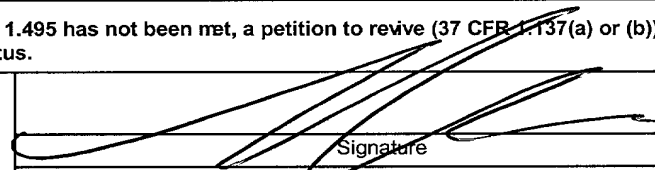


FORM PTO-1390 U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE (REV 10-94) TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371		ATTORNEY'S DOCKET NUMBER	
		113272.00103	
		U.S. APPLICATION NO.	
		Not yet assigned 09/937307	
INTERNATIONAL APPLICATION NO.	INTERNATIONAL FILING DATE	PRIORITY DATE CLAIMED	
PCT/AU00/00248	24 March 2000	24 March 1999 and 26 November 1999	
TITLE OF INVENTION	A SEPARATOR		
APPLICANT(S) FOR DO/EO/US	Richard CAULFIELD		
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other			
1.	<input checked="" type="checkbox"/>	This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.	
2.	<input type="checkbox"/>	This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.	
3.	<input checked="" type="checkbox"/>	This express request to begin national examination procedures (35 U.S.C. 371(f) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(I).	
4.	<input checked="" type="checkbox"/>	A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.	
5.	<input checked="" type="checkbox"/>	A copy of the International Application as filed (35 U.S.C. 371(c)(2))	
	a. <input type="checkbox"/>	is transmitted herewith (required only if not transmitted by the International Bureau).	
	b. <input checked="" type="checkbox"/>	has been transmitted by the International Bureau.	
	c. <input type="checkbox"/>	is not required, as the application was filed in the United States Receiving Office (RO/US)	
6.	<input type="checkbox"/>	A translation of the International Application into English (35 U.S.C. 371(c)(2)).	
7.	<input checked="" type="checkbox"/>	Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))	
	a. <input type="checkbox"/>	are transmitted herewith (required only if not transmitted by the International Bureau).	
	b. <input checked="" type="checkbox"/>	have been transmitted by the International Bureau	
	c. <input type="checkbox"/>	have not been made; however, the time limit for making such amendments has NOT expired.	
	d. <input type="checkbox"/>	have not been made and will not be made.	
8.	<input type="checkbox"/>	A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).	
9.	<input checked="" type="checkbox"/>	An executed oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).	
10.	<input type="checkbox"/>	A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).	
Items 11. to 16. below concern document(s) or information included:			
11.	<input type="checkbox"/>	An Information Disclosure Statement under 37 CFR 1.97 and 1.98	
12.	<input checked="" type="checkbox"/>	An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.	
13.	<input type="checkbox"/>	A FIRST preliminary amendment.	
	<input type="checkbox"/>	A SECOND or SUBSEQUENT preliminary amendment.	
14.	<input type="checkbox"/>	A substitute specification.	
15.	<input type="checkbox"/>	A change of power of attorney and/or address letter.	
16.	<input checked="" type="checkbox"/>	Other items or information:	Amended Sheets of PCT/AU00/00248 International Publication Number WO 00/56420 International Preliminary Examination Report with Annexes International Search Report

U.S. APPLICATION NO.		INTERNATIONAL APPLICATION NO.		ATTORNEY'S DOCKET NO.	
Not yet assigned 09/937307		PCT/AU00/00248		113272.00103	
17. <input checked="" type="checkbox"/> The following fees are submitted:				CALCULATIONS PTO USE ONLY	
BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)): Neither preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report prepared by the EPO or JPO \$1000.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$860.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search fee (37 CFR 1.445(a)(2)) paid to USPTO \$710.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$690.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00					
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$1,000.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$0.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total Claims	21	- 20 = 1	X \$18.00	\$18.00	
Independent Claims	1	- 3 = 0	X \$80.00	\$0.00	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$270.00	\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$1,018.00	
Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).				\$509.00	
SUBTOTAL =				\$509.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$0.00	
TOTAL NATIONAL FEE =				\$509.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				\$40.00	
TOTAL FEES ENCLOSED: =				\$549.00	
Amount to be refunded:				\$	
Charged:				\$	
a. <input checked="" type="checkbox"/> A check in the amount of \$549.00 to cover the above fees is enclosed.					
b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$_____ to cover the above fees. A duplicate copy of this sheet is enclosed.					
c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>23-2185</u> . A duplicate copy of this sheet is enclosed.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO: CUSTOMER NO.: 002779 BLANK ROME COMISKY & MCCAULEY LLP 900 - 17th Street, N.W., SUITE 1000 Washington, D.C. 20006			 Signature NAME Michael C. Greenbaum Registration No. 28,419 Date September 24, 2001		

A SEPARATOR

FIELD OF THE INVENTION

The present invention relates to a separator for separating particles from a fluid.

5

BACKGROUND

In many marine craft, a propeller at the end of a drive shaft extends away from the craft's stern by out rigging via a bearing. The bearing is usually cooled and lubricated by water flowing through channels or grooves which extend through the bearing. When the marine vessel passes through water where sand or grit has been disturbed, the sand/grit particles can find their way into the lubricating grooves of the bearing. These particles are highly abrasive to the bearing, and result in the bearing quickly becoming worn.

10

There is therefore a need to minimise the amount of sand or other abrasive particles from entering the lubricating grooves of the bearing.

15

SUMMARY OF THE INVENTION

An object of the present invention is to provide a separator for separating particles entrained in a fluid.

20

In accordance with a first aspect of the present invention there is provided a separator for separating particles entrained in a fluid, said separator including:

a sleeve adapted to be mounted over a rotatable shaft for forming a cavity therebetween;

25

an inlet to the cavity;

an outlet to the cavity opposite the inlet; and

means for imparting a centrifugal force on fluid within the cavity, said means operatively connected to the shaft so that, in use, spinning of the shaft creates the centrifugal force,

30

wherein, in use, a slurry of fluid and particles enters the cavity through the inlet, the particles are caused to separate from the fluid by action of the centrifugal force, the separated particles and fluid leave the cavity via the outlet with the particles tending to be

closer to the sleeve than the shaft.

Preferably, the cavity increases in cross-sectional area along its length from the inlet towards the outlet.

5

In a first embodiment, the sleeve is frustoconical in shape with the narrow end of the cone at the inlet and the wide end at the outlet, whereby the size of the cavity increases along its length from the inlet to the outlet, which causes the movement of the slurry through the cavity to slow the further it progresses along the length of the separator, thereby increasing the centrifugal action on the fluid as it moves along the length of the separator.

10

In the first embodiment, the means for imparting a centrifugal force is in the form of one or more paddles projecting from the shaft into the cavity, the paddles causing the fluid to rotate about the longitudinal axis of the shaft as the shaft spins.

15

In a second embodiment, the cavity is of a helical shape. The helix shaped cavity, acting as said means so that as it is rotated, the centrifugal force is imparted on the fluid in the cavity. Preferably, the helical shape assists in moving fluid through the cavity from the inlet to the outlet. More preferably, there is a plurality of helical shaped cavities.

20

Preferably, there is provided a first raceway between the inlet and the helical cavities.

Preferably, the inlet is of a smaller area than the outlet and thereby limiting the amount of fluid that enters the cavity.

25

Preferably, the outlet includes a parting means arranged to portion an inner layer of fluid substantially devoid of the particles from an outer layer of the fluid carrying the particles. More preferably, the parting means is in the form of a blade closely encircling the shaft.

Preferably, the outlet includes a chamber at the outlet end of the cavity between the sleeve and the shaft, the chamber arranged to receive a parting means for portioning an inner layer of fluid substantially devoid of the particles from an outer layer of fluid carrying the particles.

30

Figure 3 is a cross sectional side view of another embodiment of a separator in accordance with the present invention;

Figure 4 is a cross sectional side view of yet another embodiment of a separator in accordance with the present invention;

5 Figure 5 is a cross sectional side view of the separator of Figure 4;

Figure 6A is a complete cross sectional end view of the separator as would be seen from the section Y-Y of Figure 5;

Figure 6B is a complete cross sectional end view of the separator as would be seen from the section Z-Z of Figure 5;

10 Figure 7 is a cross sectional side view of a bladed portion of a collector of Figure 5;

Figure 8A is a complete cross sectional end view of the collector as would be seen from the section S-S of Figure 7;

Figure 8B is a complete cross sectional end view of the collector as would be seen from the section T-T of Figure 5;

15 Figure 9 is a cross sectional side view of another embodiment of a collector in accordance with the present invention;

Figure 10A is a cross sectional side view of a bladed portion of the collector of Figure 9;

Figure 10B is a cross sectional side view of a clean fluid exit portion of the collector of Figure 9; and

20 Figure 11 is a cross sectional side view of a bearing with a rear blade in accordance with the present invention.

Referring to Figure 1, there is provided a separator 10A which includes a sleeve 12. The sleeve 12 is fixed to a propeller shaft 34. An outer wall of the sleeve 12 defines a cavity
 25 18 between the outer wall and the shaft 34. The cavity has an inlet 14 at one end and an outlet 16 at another end. The outer wall is of a frustroconical shape with the narrow end of the cone at the inlet 14 and the wide end at the outlet 16. The inlet 14 is of less area than the outlet 16. The inlet 14 is of a size to allow a desired amount of a slurry of water and particles to enter the cavity 18. The outlet 16 is of a size so that separated sand particles
 30 may be layered circumferentially on the separated water so that the separated water is adjacent a lubricating groove entry 31 of a propeller shaft bearing 30.

The separator is spaced a short distance before a bearing 30 on the shaft 34. The distance may be, for example, about 1 mm. The spacing allows the sand particles to be laterally ejected from the outlet 16 as indicated by B.

- 5 Referring to Figure 2, the separator 10A includes one or more paddles or veins 20 that project from the shaft 34. The veins may also allow the sleeve 12 to be fixed to the shaft 34 by, for example, receiving grub screws 38. In this example, there are three veins, however any suitable number of veins may be used.
- 10 Referring to Figure 3, this embodiment of the separator 10B includes a cylindrical sleeve 12 fixed to the propeller shaft 34. In this case the cavity 18 is in the form of at least one helix shaped channel 52. More than one channel may be used, such as three or four, but only one is shown in the diagram for convenience. The inlet 14 is in the form of a raceway having an inwardly directed projection 50. Only a small gap is provided between
- 15 the projection 50 and the shaft 34. This is to limit the size of the particles entering the separator 10 and to limit the intake of fluid. The raceway may be detachable from the rest of the separator. After the gap, there is a circular cavity 51 that allows the fluid to flow freely before entry into the channel 52. The channel 52 widens slightly along its length so that there is minimal risk of particles becoming stuck in the channel and so that the flow
- 20 rate of the fluid decreases. For convenience, the widening in the channel is not shown in the diagram.

- An overhanging extension 20 of the sleeve 12 provides an outlet chamber 17 which forms part of the outlet 16. Within the outlet chamber 17 there is provided a collector 40 in the
- 25 form of a blade 54 that surrounds the shaft 34 to portion the separated "clean" fluid from fluid still carrying the particles. In this application only a small amount of fluid is required to lubricate the bearing 30, therefore only a small amount of clearance is required between the blade 54 and the shaft 34. However this may vary for other applications. The partitioning of the outlet 16 by the collector 40 provides a means of "peeling" off the
- 30 inside "clean" fluid which exits the separator through a clean fluid exit 24 of the outlet 16. Meanwhile the remaining fluid and particles are ejected out of a particle ejection slit 19 of the outlet 16.

Referring to Figure 4, in this embodiment of the separator 10C, the sleeve 12 is shorter in length than in the embodiment of Figure 3 and has three channels 52. The extension 20 is longer to accommodate a more sophisticated form of the collector 40. The shaft 34 is shown in phantom. In this embodiment, the collector 40 is longer and includes a plurality of grooves 72.

Figure 5 shows the separator 10C without the collector 40. At the front 11 of the separator the sleeve 12 is chamfered (at 13) to assist in streamlining. Figures 6A and 6B show the height of the three channels 52 increase along the length of the sleeve 12 so that the area of the channels 52 correspondingly increase along the length of the sleeve 12.

Figure 7 shows the collector 40 of Figure 5 in isolation. The grooves 72 extend from the edge 68 of the blade 54 to a raceway 74. The raceway 74 distributes "clean" fluid that has passed through the grooves 72 so that it may enter the bearing which fits within a collar section 76. The collar section 76 is fixed to the bearing 32 by a grub screw 80.

The collector 40 is fixed to the bearing 32 and thus does not spin with the shaft 34 and sleeve 12. The orbiting fluid is more easily scooped when the direction of rotation of the helical shaped grooves 72 are opposite to the direction of rotation of the channels 52. Where the blade 54 narrows to a thickness equal to the height of the grooves 72. The grooves 72 create gaps in the blade 54. The parts of blade between the gaps are finger-like. These fingers further assist in scooping the "clean" fluid into the grooves 72. A curved surface 62 of the blade 54 extending away from the blade edge 68 parts the particles from the "clean" fluid.

Due to the shaft 34 spinning inside the collector 40, adequate clearance 73 is required between the inner surface of the collector 40 and the shaft 34. It is however, envisaged that in some applications the collector 40 may be fixed to the shaft 34 rather than the bearing 30. In this case, the grooves 72 are preferably in the same direction as the channels 52.

Figures 8A and 8B show the grooves 72 extending through the collector 40 between the edge 68 and the raceway 74. The clearance 73 between the shaft 34 and inner surface of the collector 40 can be clearly seen.

- 5 Figure 9 shows an alternative form of the collector 40A which includes a bladed portion 44 and a clean fluid exit portion 44. These are shown coupled together.

Figure 10A shows the bladed portion 44, which includes the blade 54 that encircles the shaft 34 by a narrow gap 73. The bladed portion 44 also includes a step 45 for connecting
10 to the clean fluid portion 46. An outer surface 63 of the step extends from the curved surface 62.

Figure 10B shows the clean fluid exit portion 46, which includes the plurality of grooves 72 that extend from a front 60 of the portion 46 to the raceway 74. The grooves 72 are
15 helical in shape so as to sweep the fluid therethrough. Alternatively they may be straight and parallel with the shaft 34.

Figure 11 shows the bearing 30 with a rear blade 90. There is a raceway 92 that allows fluid that has passed through the lubricating channels 32 to collect and then exit the
20 bearing as shown by D. The rear blade 90 is useful when the shaft is spinning in reverse. Due to the narrow opening between the blade and the shaft 34, it will act as a simple sieve discouraging particles to travel the wrong way into lubricating grooves 32.

The method of use and operation of the present invention will now be described with
25 reference to the accompanying drawings.

A marine craft is propelled forward by propeller 36 mounted on the propeller drive shaft 34. In the first embodiment, the forward motion causes a slurry of water and sand and possibly other particles to enter the inlet 14 as shown by arrows A. In the second
30 embodiment the helical shape of the channel draws the water and particles into the inlet 14. Large particles are prevented from entering the raceway by the projection 50.

When the slurry of water and particles enters the cavity 18 either the veins 20 or the helical shaped channels cause the slurry to spin with the rotation of the shaft 34. The slurry continues to move along the length of the separator 10 either by forward motion, venturi effect described below or the helical shape. As the slurry moves along the length of the separator the widening of the cavity presents an increasing area to the slurry. This causes the flow of the slurry to slow. At the same time, the slurry is orbiting the shaft. Due to the orbiting motion, a centrifugal force acts upon the particles causing them to move closer to the sleeve than the water. This may be more pronounced in the second embodiment where the length of the cavity 18 is greater than the distance between the inlet and the outlet due to its helical shape.

The particles move along the inside surface of the sleeve until they reach the outlet 16. Movement of the sand particles may be assisted by the sloping of the inside of the sleeve. In the second and third embodiments, the blade 54 provides a physical partition between the inner "clean" water and the outer slurry. The particles are ejected from the separator as shown by arrow B. Some of the separated clean water may enter the lubricating grooves 32 of the bearing 30 at C. The remainder of the water will also exit the separator with the sand at B. The ejection of the particles and water may cause a venturi effect which causes the slurry to be sucked into and through the cavity 18. Once the water entering the bearing has passed through the bearing grooves 32 it exits at D.

The bearing may be provided with a collector 40 in the form of a projection 42 that projects a short distance into the separator as shown in figure 1. This is thought to assist in the uptake of the separated water into the bearing and also assist in the ejection of the sand particles and corresponding venturi effect. The collector 40 also acts as a partition. The blade 54 in figure 3 may be considered a more somewhat sophisticated form of this. The collector in the third embodiment is an even more sophisticated form of partition.

An escape passage between the collector 40 and the extension 20 leads from the outlet chamber 17 to the ejection slit 19. Within the escape passage there is a turbulence means in the form of a series of circumferencial grooves 66 in the outer surface of collector 40. These grooves 66 create turbulence in the slurry of particles and remaining fluid. The

turbulence slows down the slurry flow so that the venturi effect of the ejected particles does not create a suction strong enough to draw fluid in through the bearing 34. In addition, the turbulence reduces the possibility of particles becoming trapped. After the grooves 66 is an exit chute 64 that opens to the exterior of the separator 10C and forms the ejection slit 19.

It will be clear to those skilled in the art that the present invention has at least the advantage of reducing the occurrence of sand entering the lubricating grooves of the bearing, thereby reducing the wear on the bearing.

Modifications and variations will be apparent to those skilled in the art, such as the number of veins, the length of each vein or the number of helical channels may vary; the length of the separator may vary provided that the slurry is caused to orbit the shaft and thus introduce the centrifugal separating effect on the sand particles or the form and complexity of portion may also vary. It is envisaged that the separator may find application other than for minimising the amount of abrasive particles entering the lubricating grooves of a propeller shaft bearing. Such other applications may require further modifications. Such modifications and variations are intended to be within the scope of the present invention, the nature of which is to be determined from the foregoing description.

Preferably, the sleeve is arranged to rotate about its axis relative to the parting means.

Preferably, the outer layer is ejected from a first exit of the outlet. Preferably, the parting means includes a turbulence means for slowing the exit of the fluid carrying the particles
5 from the outlet.

Preferably, the parting means is arranged to be fixed to a bearing.

Preferably, the parting means includes a scoop means for scooping the inner layer of fluid
10 away from the blade to a second exit of the outlet.

Preferably, the scoop means is in the form of a plurality of curved channels. Preferably, the scoop means is provided with a second raceway between the curved channels and the second exit.
15

According to a second aspect of the present invention, there is provided a separator and parting means combination, the separating means as defined above and the parting means is arranged to partition an inner layer of fluid substantially devoid of particles from an outer layer of fluid carrying the particles.
20

According to a third aspect of the present invention, there is provided a separator, parting means and a bearing combination, the separator and parting means as defined above, the bearing arranged to receive the inner layer of fluid from the parting means.

25 DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

In order to provide a better understanding, preferred embodiments of the present invention will now be described in detail, by way of example only, with reference to the accompanying diagrams in which:

Figure 1 is a cross sectional side view of a separator in accordance with the present
30 invention;

Figure 2 is a complete cross sectional end view of the separator as would be seen from the section X-X of Figure 1;

CLAIMS

The claims defining the invention are as follows:

1. A separator for separating particles entrained in a fluid, said separator including:
5 a sleeve adapted to be mounted over a rotatable shaft for forming a cavity therebetween;
an inlet to the cavity;
an outlet to the cavity opposite the inlet; and
means for imparting a centrifugal force on fluid within the cavity, said means
10 operatively connected to the shaft so that, in use, spinning of the shaft creates the centrifugal force,
wherein, in use, a slurry of fluid and particles enters the cavity through the inlet, the particles are caused to separate from the fluid by action of the centrifugal force, the separated particles and fluid leave the cavity via the outlet with the particles tending to be
15 closer to the sleeve than the shaft.
2. A separator according to claim 1, wherein the cavity increases in cross-sectional area along its length from the inlet towards the outlet.
- 20 3. A separator according to claim 1, wherein the sleeve is frustoconical in shape with the narrow end of the cone at the inlet and a wide end at the outlet, whereby the size of the cavity increases along its length from the inlet to the outlet.
4. A separator according to claim 1, wherein said means is in the form of one or more
25 paddles projecting from the shaft into the cavity.
5. A separator according to claim 1, wherein the inlet is of a smaller area than the outlet.
- 30 6. A separator according to claim 1, where in the cavity is of a helical shape.
7. A separator according to claim 6, wherein said helical shape of the cavity acts as

said means for imparting centrifugal force.

8. A separator according to claim 1, wherein the outlet includes a chamber at the end
outlet of the cavity between the sleeve and the shaft, the chamber arranged to receive a
5 parting means for portioning an inner layer of fluid substantially devoid of the particles
from an outer layer of fluid carrying the particles.

9. A separator according to claim 1, wherein said outlet includes a parting means
arranged to portion an inner layer of fluid substantially devoid of the particles from an
10 outer layer of the fluid carrying the particles.

10. A separator according to claim 9, wherein the parting means is in the form of a blade
closely encircling the shaft.

11. A separator according to claim 9, wherein the sleeve is arranged to rotate about its
axis relative to the parting means.

12. A separator according to claim 9, wherein the outer layer is ejected from a first exit
of the outlet.

13. A separator according to claim 12, wherein the first exit includes a turbulence means
for slowing the exit of fluid carrying particles from the first exit.

14. A separator according to claim 9, wherein the parting means includes a scoop for
25 scooping the inner layer of fluid away from an edge of the blade to a second exit of the
outlet.

15. A separator according to claim 14, wherein the scoop is in the form of a plurality of
channels in the parting means.

16. A separator according to claim 6, wherein a first raceway is provided between the
inlet and the helical cavity.

17. A separator according to claim 15, wherein a second raceway is provided between the channels in the parting means and the second exit.

5 18. A separator and parting means combination, the separator as defined in claim 1, wherein the parting means parts an inner layer of fluid substantially devoid of particles from an outer layer of fluid carrying particles.

10 19. A separator and bearing combination, the separator as defined in claim 1, the bearing arranged to receive fluid substantially devoid of particles from close to the shaft from the outlet of the separator.

15 20. A separator, parting means and a bearing combination, the separator and parting means as defined in claim 18, the bearing arranged to receive the inner layer of fluid from the parting means.

21. A separator, parting means and a bearing combination according to claim 19, wherein the bearing is provided with a sieve means on an opposite side of the bearing to the separator.

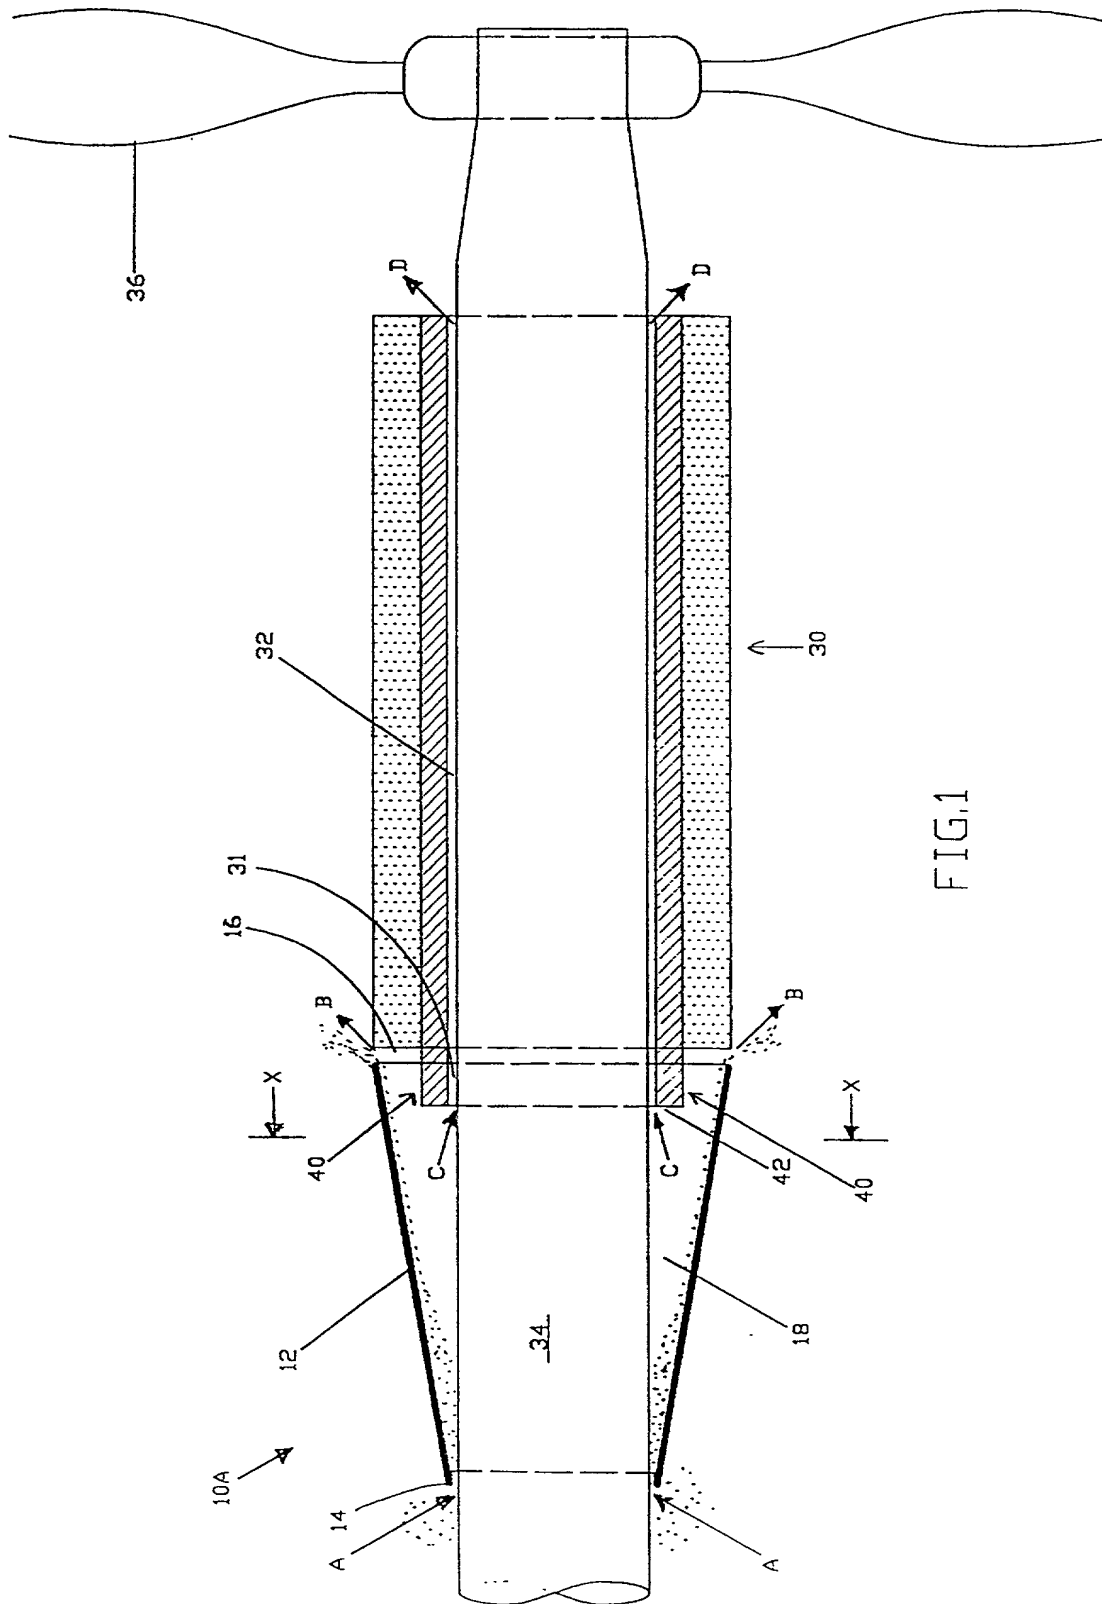


FIG. 1

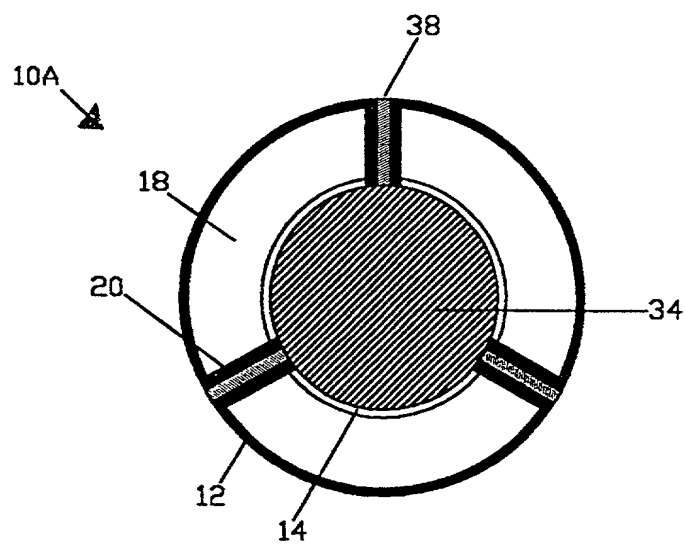


FIG. 2

09/937307

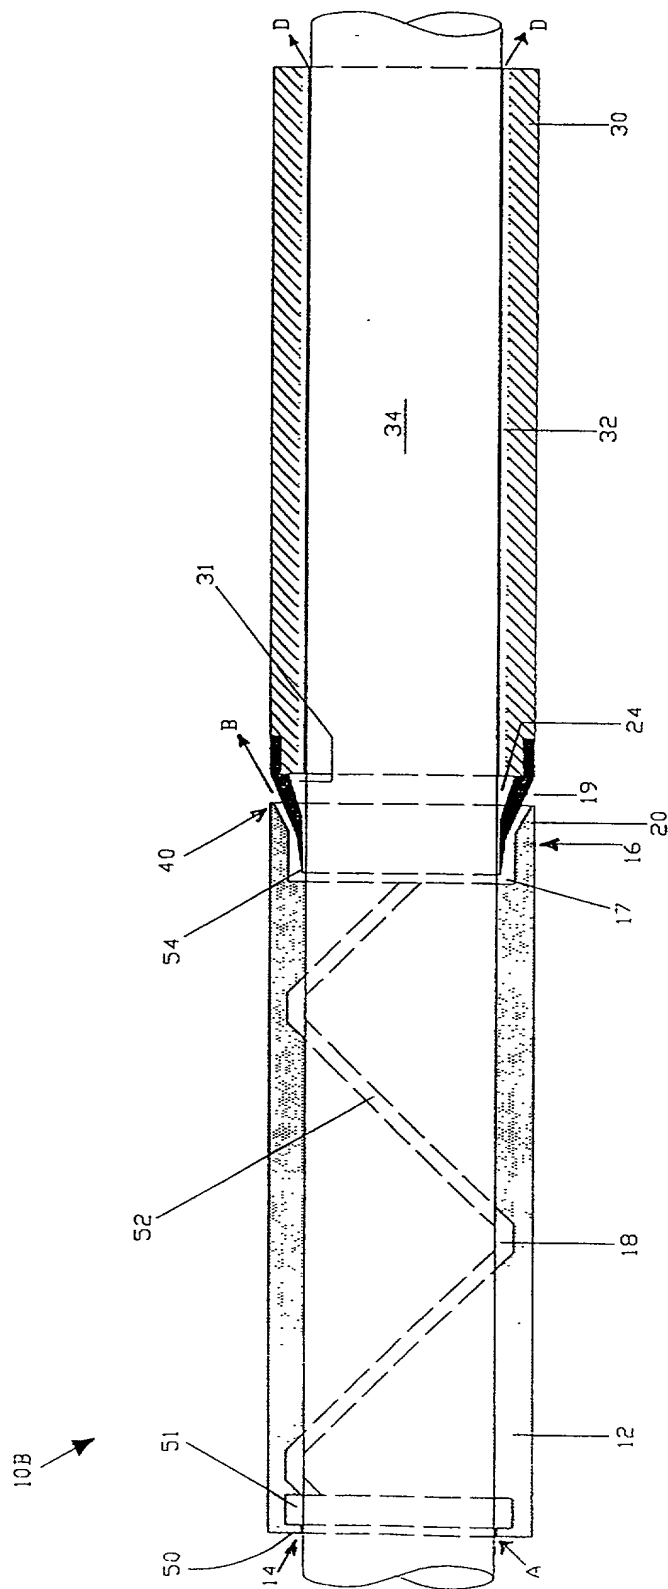


FIG. 3

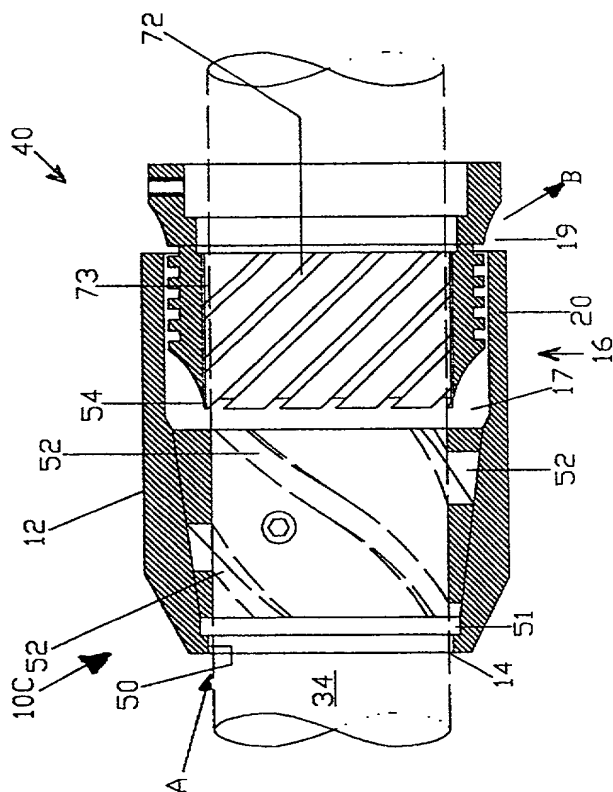


FIG. 4

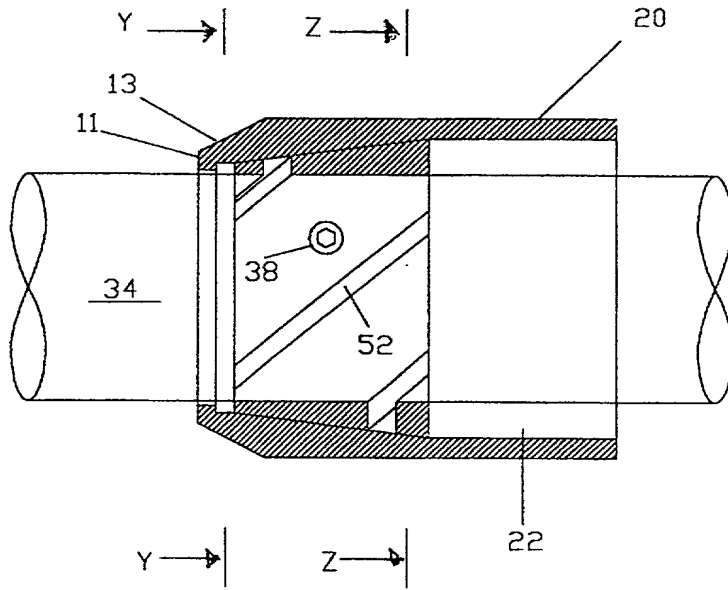


FIG. 5

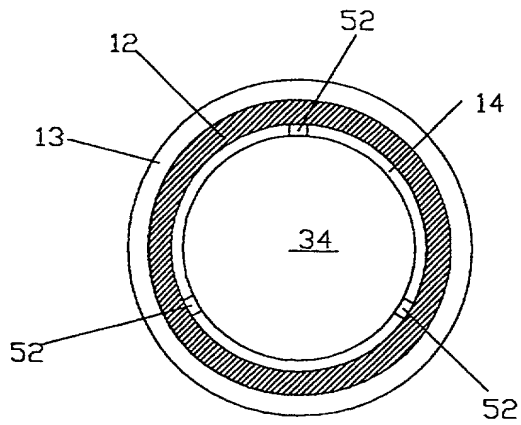


FIG. 6A

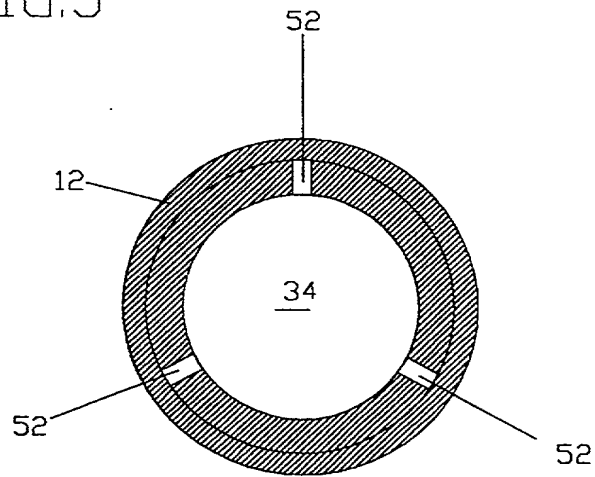


FIG. 6B

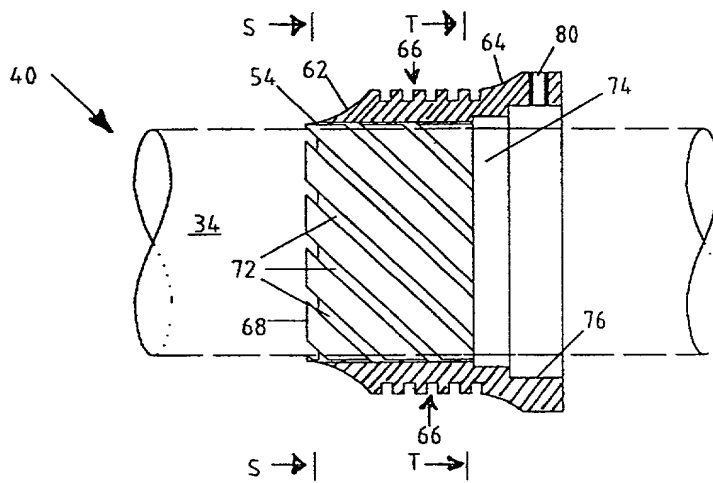


FIG. 7

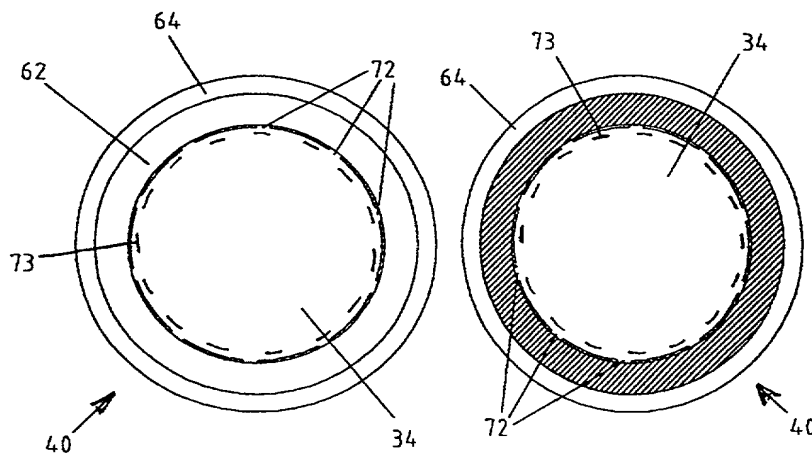


FIG. 8A

FIG. 8B

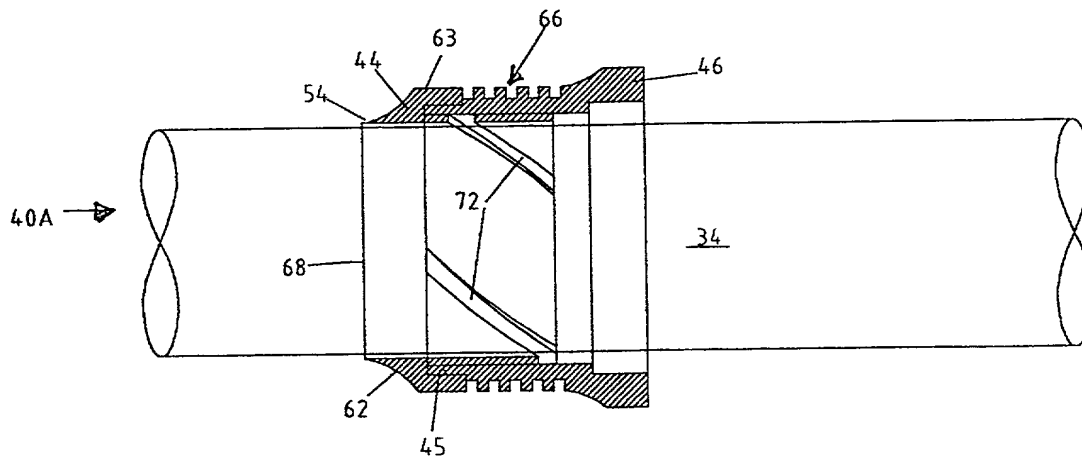


FIG. 9

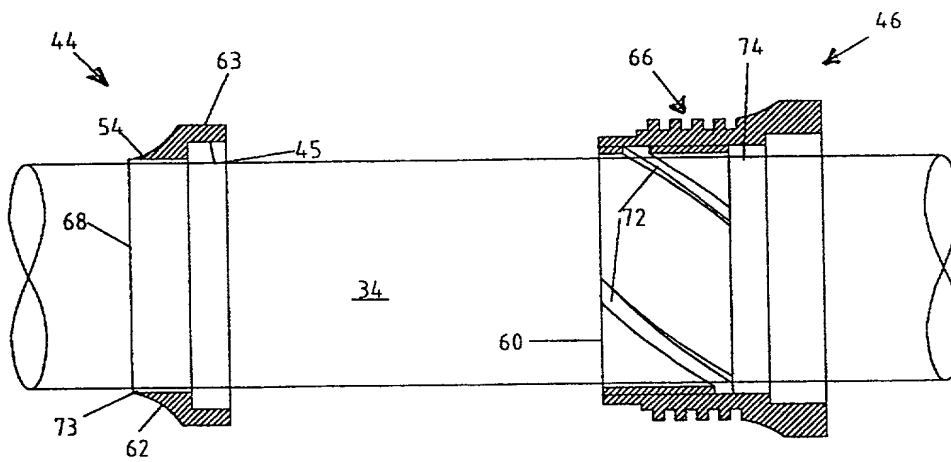


FIG. 10A

FIG. 10B

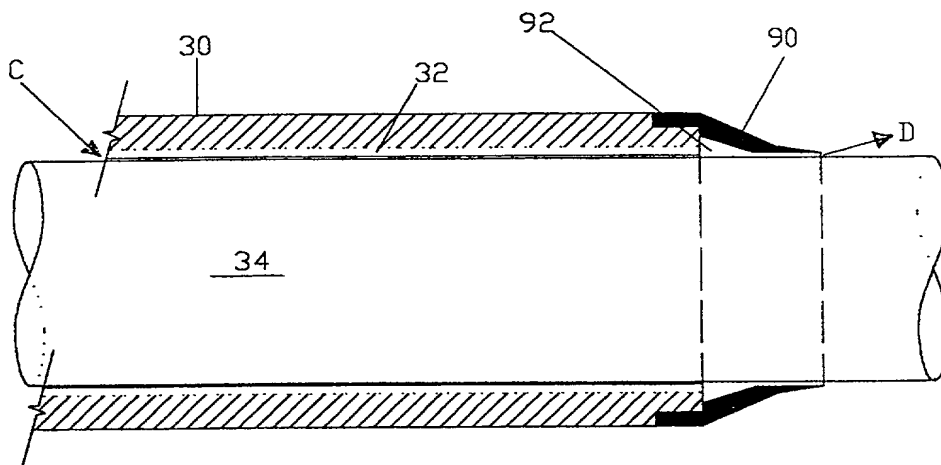


FIG.11

DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

A SEPARATOR

the specification of which

☐ is attached hereto

☒ was filed on 24 March 2000 as United States Application Number or PCT International

Application Number PCT/AU00/00248 and (if applicable) was amended on 25 January 2001

I hereby authorize our attorneys to insert the serial number assigned to this application.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

PRIOR FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 USC §119

APPLICATION NO.	COUNTRY	DAY/MONTH/YEAR FILED	PRIORITY CLAIMED
PP 9419	Australia	24 March 1999	Yes
PQ 9419	Australia	26 November 1999	Yes

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below.

PROVISIONAL APPLICATION(S) UNDER 35 U.S.C. §119(e)

APPLICATION NUMBER	FILING DATE

I hereby claim the benefit under 35 U.S.C. §120 of any United States application, or §365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. §112.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

PRIOR U.S./PCT INTERNATIONAL APPLICATION(S) DESIGNATED FOR BENEFIT UNDER 35 U.S.C. §120

APPLICATION NO.	FILING DATE	STATUS — PATENTED, PENDING, ABANDONED

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith: Herbert Cohen, Reg. No. 25,109; Victor M. Wigman, Reg. No. 25,201; George C. Myers, Jr., Reg. No. 27,040; Donald R. Greene, Reg. No. 22,470; Michael C. Greenbaum, Reg. No. 28,419; Charles R. Wolfe, Jr., Reg. No. 28,680; Michael D. White, Reg. No. 32,795; David J. Edmondson, Reg. No. 35,126; Denise C. Lane, Reg. No. 42,780; Peter Weissman, Reg. No. 40,220; and Rafael Perez, Reg. No. 46,041.

Correspondence Address:

BLANK ROME COMISKY & MCCAULEY, LLP

The Farragut Building

Suite 1000

900 17th Street, NW

Washington, DC 20006

TEL (202) 530-7400

FAX (202) 463-6915

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of sole or first inventor (given name, family name)	
Richard Caulfield	
Signature	Date
<i>[Signature]</i>	20-09-2001
Residence	Citizenship
72 Gutteridge Road, Banjup, Western Australia 6164 Gutteridge AUSTRALIA AUX	Australian British
Post Office Address	
Full Name of additional joint inventor (given name, family name)	
Signature	Date
Residence	Citizenship
Post Office Address	
Full Name of additional joint inventor (given name, family name)	
Signature	Date
Residence	Citizenship
Post Office Address	